


## SPECIFICATIONS

LENGTH	12" – 48" Random
DEPTH	3½"
THICKNESS	2¼"
FINISH	Sawn
CONTENT	Granite
ORIGIN	North America

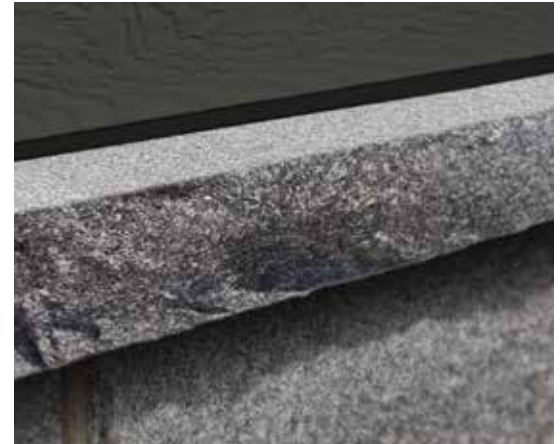

*Kafka's natural stone Silles deliver a premium, finished look and complement other Kafka natural stone products. Each natural stone color takes on a new life with the various finishing options available: Thermal, Bush Hammer, Sawn, or Honed.*

### ASTM C-97 – ABSORPTION & BULK SPECIFIC GRAVITY

WATER ABSORPTION	.09%
BULK SPECIFIC GRAVITY	2.672

### ASTM C-170 – COMPRESSIVE STRENGTH

PARALLEL TO RIFT DRY	34,280 psi
PARALLEL TO RIFT, WET	29,460 psi
PERPENDICULAR TO RIFT, DRY	32,750 psi
PERPENDICULAR TO RIFT, WET	31,770 psi

### ASTM C-99 – MODULUS OF RUPTURE

PARALLEL TO RIFT DRY	2,410 psi
PARALLEL TO RIFT, WET	1,910 psi
PERPENDICULAR TO RIFT, DRY	2,540 psi
PERPENDICULAR TO RIFT, WET	2,060 psi

### ASTM C-880 – FLEXURAL STRENGTH

PARALLEL TO RIFT DRY	2,440 psi
PARALLEL TO RIFT, WET	2,150 psi
PERPENDICULAR TO RIFT, DRY	2,510 psi
PERPENDICULAR TO RIFT, WET	2,050 psi

